

# Sensitivity Analysis of Selected Random Variables of Existing Offshore Jacket Structures in Persian Gulf

Mostafa Zeinoddini<sup>1</sup>, Hamid Golpour<sup>2</sup>, Hadi Khalili<sup>3</sup>, Hamid Matin Nikoo<sup>4</sup>, Iman Ahmadi<sup>5</sup>

<sup>1</sup> Prof, K. N. Toosi University of Technology and TWI Persia; zeinoddini@kntu.ac.ir

<sup>2</sup> Structural Integrity Section, TWI Persia; hamid.golpour@twi-turkey.com

<sup>3</sup> Structural Integrity Section, TWI Persia; hadi.khalili@twi-turkey.com

<sup>4</sup> Structural Integrity Section, TWI Persia; hamid.matinnikoo@twi-turkey.com

<sup>5</sup> Senior Structural Engineer; i.ahmadi@pogc.ir

## ARTICLE INFO

### Article History:

Received: 23 Sep. 2016

Accepted: 15 Mar. 2017

### Keywords:

Structural integrity  
Sensitivity analysis  
Random variables  
Existing offshore structures

## ABSTRACT

Structural integrity evaluation of an existing offshore platform typically is based on a combination of non-linear structural analysis together with risk and reliability analysis. Quantitative assessment of the probability of failure of a jacket platform under extreme metocean loads is a multi-disciplinary task, poses significant challenges and involves a large number of uncertainties regarding the metocean hazards, structural system and modelling, loads, material behaviour and geotechnical information. The probability of failure is commonly estimated using a reliability analysis to account for uncertainties in derivation of both the loading and the strength.

Different sources of uncertainties contribute to the platform ultimate strength. Sensitivity analysis should be carried out to provide quantitative information necessary for classifying random variables according to their importance. These measures are essential for reliability-based service life prediction of deteriorating materials and structures. Accordingly, in this paper, Tornado approach has been used to identify those variables that affect the failure most so that more research can focus on those variables. To this end, six existing offshore platforms located in Persian Gulf are investigated. The results have been presented in the form of a Tornado diagram which will graphically show the sensitivity of the target function to each random variable.

## 1. Introduction

Structural integrity assessment is an ongoing procedure to ensure the reliability of the offshore structures and the safety of their operation. A significant number of researches have been carried out on the structural assessment of existing offshore platforms subjected to extreme loading [Ref. 1][Ref. 2][Ref. 3]. Since offshore structures require more critical and complex designs, the need for accurate approaches to evaluate uncertainty in loads, geometry, and material properties has increased significantly [Ref. 4]. The effect of variables on the reliability of an existing offshore platform can be analysed by doing a comprehensive sensitivity analysis. In view of the large number of variables that affect the aging/collapse process and limit states, it is of interest to identify those variables that affect the failure most. Sensitivity analysis is widely accepted as a necessary part of reliability analysis of structures and infrastructures [Ref. 5][Ref. 6][Ref. 7][Ref. 8].

Sensitivity analysis is the study of how the variation in the output of a model (numerical or otherwise) can be apportioned, qualitatively or quantitatively, to different sources of variation [Ref. 9]. Among the reasons for using sensitivity analysis are:

- To identify the factors which have the most influence on reliability of the structure.
- To identify factors that may need more research to improve confidence in the analysis.
- To identify factors which are insignificant to the reliability analysis and can be eliminated from further analysis.
- To identify which, if any, factors or groups of factors interact with each other.

To the best authors' best knowledge, sensitivity analysis has not yet been investigated for existing offshore structures. Accordingly, in this paper, a comprehensive study on the sensitivity analysis of steel jacket structures located in Persian Gulf has been carried out.

### 1. Sensitivity Analysis

Sensitivity analysis provides the degree of variation of limit state functions or measures at a specific point characterized by a realisation of all random variables. Similarly to the conventional sensitivity measure in the reliability approaches, the sensitivity measure,  $S$ , can be defined as follows [Ref. 10]:

$$S_{G(X)}(X_i) = \frac{\partial G(X)}{\partial X_i} = \lim_{\varepsilon \rightarrow 0} \frac{G(X + \varepsilon) - G(X)}{\varepsilon} \quad (1)$$

Where  $G$  is a performance function of  $X$ :  $X$  and  $\varepsilon$  are vectors; and  $\varepsilon$  is a small perturbation. An element  $X_i$  of  $X$  can be any type of variable or parameter. For instance, it can be a mean or a standard deviation of a variable, or a deterministic parameter. For a complex system, the sensitivity measure can be computed by using the numerical differentiation method rather than by an analytical approach [Ref. 10]. Different sensitivity approaches have been introduced. In the current research, Tornado methodology will be discussed and will be used.

### 2. Tornado Approach

Tornado approach can be used to show the sensitivity of the response to each random variable, graphically [Ref. 11]. It produces something called a tornado diagram that depicts the approximate effect of each uncertain on the quantity of interest. The method comes from the field of decision analysis. Its first proposed use in earthquake engineering may be by the present author [Ref. 12][Ref. 13], and it has been used in performance-based earthquake engineering and seismology a few times since then.

Here first is a description of the procedure [Ref. 13]. Briefly, one selects a low, typical, and high value of each input parameter. One then estimates the output parameter using typical values of all the inputs except one, which is set at its low value. Repeat the process with the same input set at its high value. The difference between the last two outputs is referred to as the swing associated with the one input that was varied. That input is then set back to its typical value and the process is repeated for the next input, again setting all the other inputs to their typical value. A horizontal bar chart is then created by depicting the swing associated with each input variable as a bar whose ends are at the low and high values of the output produced by changing just that input. The  $x$ -axis is the value of the output. The bars are arranged with the input that has the highest swing on the top, then the input with the second-highest swing, etc.

More precisely, suppose a function for a quantity  $y$  wanted to study [Ref. 13]:

$$y = f(x_1, x_2, \dots, x_i, \dots, x_n) \quad (2)$$

For each random variable  $x_i$ , three values including  $\mu - \sqrt{3}\sigma$ ,  $\mu$ ,  $\mu + \sqrt{3}\sigma$  are taken into account, where  $\mu$

and  $\sigma$  denote the mean/median and standard deviation of each random variable, respectively.

$$y_{baseline} = f(x_{1typ}, x_{2typ}, \dots, x_{ityp} \dots x_{ntyp}) \quad (3)$$

This is the baseline value, now conducting the sensitivity of  $y$  to the uncertainty in each  $x$ :

$$(4)$$

$$y_{1low} = f(x_{1low}, x_{2typ}, \dots, x_{ityp} \dots x_{ntyp}) \quad \text{i.e., all typical values except using } x_{1low}$$

$$y_{1high} = f(x_{1high}, x_{2typ}, \dots, x_{ityp} \dots x_{ntyp}) \quad \text{i.e., all typical values except using } x_{1high}$$

$$y_{2low} = f(x_{1typ}, x_{2low}, \dots, x_{ityp} \dots x_{ntyp}) \quad \text{i.e., all typical values except using } x_{2low}$$

$$y_{2high} = f(x_{1typ}, x_{2high}, \dots, x_{ityp} \dots x_{ntyp}) \quad \text{i.e., all typical values except using } x_{2high}$$

$$y_{ilow} = f(x_{1typ}, x_{2typ}, \dots, x_{ilow} \dots x_{ntyp}) \quad \text{i.e., all typical values except using } x_{ilow}$$

$$y_{ihigh} = f(x_{1typ}, x_{2typ}, \dots, x_{ihigh} \dots x_{ntyp}) \quad \text{i.e., all typical values except using } x_{ihigh}$$

$$y_{nlow} = f(x_{1typ}, x_{2typ}, \dots, x_{ityp} \dots x_{nlow}) \quad \text{i.e., all typical values except using } x_{nlow}$$

$$y_{nhigh} = f(x_{1typ}, x_{2typ}, \dots, x_{ityp} \dots x_{nhigh}) \quad \text{i.e., all typical values except using } x_{nhigh}$$

Then with a quantity called swing the sensitivity of  $y$  to uncertainty in each  $x$  can be evaluated:

$$Swing_1 = |y_{1low} - y_{1high}| \quad (5)$$

$$Swing_2 = |y_{2low} - y_{2high}|$$

$$\dots Swing_i = |y_{ilow} - y_{ihigh}|$$

$$\dots Swing_n = |y_{nlow} - y_{nhigh}|$$

By sorting  $x$  parameters in decreasing order of swing, a horizontal bar chart namely Tornado diagram is generated. The uppermost (top) horizontal bar in the diagram measures  $y_i$  with where  $i$  is the index for the input parameter with the largest swing.

The next horizontal bar measures  $y_j$  where  $j$  is the index for the  $x$ -parameter with the 2<sup>nd</sup>-largest swing. The result looks like a tornado in profile. Drawing a vertical line at  $y_{baseline}$ , one can explore the 2 or 3 or 4  $x$ -parameters that matter most, and ignore the rest or treat them more casually, that is, with less effort to quantify or propagate their uncertainty.

### 3. Modelling and Methodology

#### 4.1 Case studies

This paper presents a number of case studies for the sensitivity analysis of existing aging drilling platforms located in the Persian Gulf. The platforms, typically, are now around 40 years old and the objective of the

study is to identify the factors which have the most influence on reliability of the structure and its fit for purpose for a life extension.

Figure 1 and Table 1 give the overall views and specifications of the platforms, respectively.

AA, Production Platform (6-Legged)



2S-19, Wellhead Platform (3-Legged)



R1-NSP, Service Platform (4-Legged)



Nasr-N2, Drilling Platform (6-Legged)



Nasr-LQ, Living Quarter (4-Legged)



Nasr Production Platform (6-Legged)



Figure 1: Overall views of the studied platforms

#### 4.2 Numerical Modeling

Three-dimensional structural model of the platforms have been generated using SACS software [Ref. 14]. The structural model is based on the best estimates of the existing conditions of the platforms. The models incorporate all primary and secondary steel structural members in the topside and in the jacket part such as legs, vertical and horizontal bracings, piles, the deck main girders and truss members. Those members that do not contribute significantly to the structural stiffness and load bearing such as boat landing, stiffeners, handrails, deck gratings, stairs, ladders, etc. have been modelled as dummy elements or their environmental and gravitational loads have been taken into consideration .

Some other considerations and assumptions used in the modelling are as follow:

- The effect of including local joint flexibility in the assessment of an existing offshore structure can significantly reduce uncertainties on calculated fatigue lives at tubular joints especially for joints in horizontal frames [Ref. 15]. in the current study, the joint flexibility has then been considered.
- The model also incorporates structural anomalies discovered in the underwater survey. Anomaly modelling for the cracked and the perforated members are based on general guidelines and the methodology provided by ABS for the ultimate strength of the perforated members [Ref. 16].
- For the members located in the splash zone of the platforms, this corrosion allowance shall be added to

the corrossions measured and reported by underwater survey reported. No corrosion thickness allowance will be considered for the structural members located below the splash zone.

- Gerwick [Ref. 17] reported that: "typical rates of corrosion of uncoated steel in seawater are 0.15 mm/year in the splash zone; 0.07 mm/year in the submerged zone. Other studies for uncoated steel in seawater give rates of 0.127 mm/year." On that basis, a corrosion thickness allowance has been considered for the structures.
- The effective buckling length of the members used in the calculation of axial allowable compressive stresses is in accordance with the recommendation of API RP 2A [Ref. 18]. The effective buckling length is calculated as the K-factor multiplied by the un-braced length of the member relative to in-plane or out-of-plane buckling. These factors are input relative to the corresponding local Y and Z axes of each member.
- Based on API RP 2A-17.7.2b [Ref. 18], for the structural assessment purposes, lower values for effective length (k) factors may be used when

justified. This is because studies and tests have indicated that effective length (k) factors are substantially lower for elements of a frame than those specified in API RP 2A-3.3.1d. It is noted Eurocode 3 [Ref. 19] recommends an effective buckling length equal to 0.75L or less (where L is the member length) for hollow section brace members in welded lattice frames. For the Ultimate Strength assessment, the effective length (k) factors for K bracings, diagonals and X bracings were taken as 0.7 instead of the larger "k" values given in the API RP 2A [Ref. 18].

- The structures have been modeled considering structural steel material properties as specified in the Design Calculation Notes. As per API RP 2A-C17.7.3 [Ref. 18], for the Ultimate Strength Level analysis of the platform, instead of nominal yield strength, the mean yield strength of the steel material can be used. As an example, for A36 steel material, with the nominal, yield strength of 36 ksi (23.5 kN/cm<sup>2</sup>), mean yield strength of 42 ksi (27.5 kN/cm<sup>2</sup>) has been considered in the Ultimate Strength Level analysis. This is around 17% increase in material yield strength to account primarily for the increase from nominal to mean strength.

Table 1: Specification of the studied platforms

District	Field	Platform Name	Platform Activity	No. of Legs	Bracing Type	Soil Type	Installation Year	No. of Riser/ Conductors	Water Depth (m)
Sirri	Dena	Nasr-PP	Production	6	V-Shape	Silty Clay	1976	16	60.0
		Nasr-LQ	Living Quarter	4	Diagonal	Silty Clay	1990	---	60.0
		N2	Drilling	6	Diagonal		1976	10	59.0
Kharg	Aboozar	AA	Production	6	Diagonal	Sand-Clay	1976	6	37.0
Lavan	Salman	2S19	Wellhead	3	X-Shape	Sand	1973	3	35.0
	Resalat	R1-NSP	Service Platform	4	V-Shape	Sand-Clay	1970	5	67.0

4.3 Analysis Methodology

A number of Push-over analyses have been carried out to assess the platforms Ultimate Strength against metocean loadings. Metocean loads acting along the weakest direction (among the main eight directions in LAT and HAT modes). Primary load combinations are formed by combining basic load cases within the SACS Sea-state module prior to the analysis. Each load combination is then incrementally applied to the structures. Adjustments in the load increments are based on engineering judgments and the response of the structures.

The static Push-over analysis provides an insight on the load bearing performance of the platform, indicates the weak links, failure modes, the ultimate strength as well as the post-yield behavior of the

structure. When a Push-over analysis is complete, the ultimate lateral load bearing capacity of the structure is expressed in terms of "Reserve Strength Ratio" (RSR) which is defined as:

$$RSR = \frac{\text{Ultimate Lateral Load That Causes failure}}{100\text{Year Environmental Lateral Loading}} \quad (6)$$

An Ultimate Strength analysis is generally believed to provide a balanced estimate of the platform load bearing capacity. The Ultimate Strength analysis may be carried out either as quasi-static analyses (push-over) or as dynamic time-domain analyses. For the Ultimate Strength Level assessments, metocean criteria are specified in terms of factors relative to resultant load from 100-year environmental conditions. The Reserve Strength Ratio (RSR) is used

Downloaded from ijcoe.org at 9:00 +0330 on Thursday September 23rd 2021

to specify the ultimate strength of the platform. RSR is the ratio of a platform's ultimate lateral load carrying capacity to its 100-year lateral environmental loading, as basis. The latter is computed using criteria, as described in API RP 2A-2.3, for new design [Ref. 18].

The "COLLAPSE" module of SACS [Ref. 14] is employed to carry out the non-linear quasi-static (Push-over) analyses. For the collapse (Push-over) analyses, which are load-path dependant, it is not possible to directly solve for structural actions at any instant, so an incremental analysis procedure is used. Hence, the loading was applied in a series of increments until global failure of the platform occurred. It is worth noting that Push-over results

were presented based on Reserve Strength Ratio (RSR).

Different sources of uncertainties such as in the structural modelling, in the stress analysis, in the component capacity formulations, in the damage evaluation and its modelling, in the overall structural resistance, in the as-is condition data, in the knowledge about the platform inspection, maintenance and repair records, in the nonlinear software predictions accuracy, in the pile/soil interaction, in the foundation behaviour and capacity, in the material yield strength and module of elasticity, in the members actual dimensions and thickness, in the platform weight and its gravitational loads, etc contribute to the overall RSR uncertainty. Variability in some of these parameters is listed in Table 2.

**Table 2: Statistical characteristics of some random variables which might have impacts on the platform probability of failure**

Random Variable	Symbol	Mean / Median	Cov.	Type	Reference
<i>Parameters influencing variability of the wave force on the structure</i>					
Drag Coefficient	$C_d$	0.65, 1.10	0.25	Lognormal	[Ref. 20][Ref. 21]
Inertia Coefficient	$C_m$	1.60, 1.27	0.10	Lognormal	[Ref. 20][Ref. 21]
Marine Growth	$MG$	75mm, 50mm	0.50	Lognormal	[Ref. 20][Ref. 21]
<i>Parameters influencing uncertainties in the structural model</i>					
Load and Masses	$M, W$	Computed	0.10	Normal	[Ref. 21]
Yield Stress of Legs	$f_{y,L}$	335 MPa, 345 MPa	0.07	Lognormal	[Ref. 21]
Yield Stress of Braces	$f_{y,B}$	335 MPa, 345 MPa	0.07	Lognormal	[Ref. 21]
Modulus of elasticity	$E_s$	$2.0601 \times 10^5$ MPa	0.03	Lognormal	[Ref. 21]
<i>Parameters influencing uncertainties in the pile-soil interaction</i>					
Undrained shear strength	$C_u$	*	0.3	Normal	[Ref. 22][Ref. 23]
Unit weight	$\gamma$	*	0.1	Normal	[Ref. 22][Ref. 23]
Strain occurs at one-half the maximum stress	$\epsilon_{50}$	*	0.4	Normal	[Ref. 22][Ref. 23]
Friction angle	$f$	*	0.02-0.05	Normal	[Ref. 23]

#### 4. Results and Discussion

The "COLLAPSE" module of SACS [Ref. 14] is employed to carry out the non-linear quasi-static (Push-over) analyses. For the collapse (Push-over) analyses, which are load-path dependent, it is not possible to directly solve for structural actions at any instant, so an incremental analysis procedure is used. Hence, the loading was applied in a series of increments until global failure of the platform occurred. It is worth noting that Push-over results were presented based on Reserve Strength Ratio (RSR). Different sources of uncertainties contribute to the platform ultimate strength or its normalized ultimate strength (RSR). To determine the prominent parameters affecting the behaviour of jacket platform, random variables listed in Table 2 has been taken into

account. For each random variable of  $X_i$ , two extreme values of  $\mu_i \pm \sqrt{3}\sigma_i$  are taken. Values of  $\mu_i$  and  $\sigma_i$  denote the mean/median and the standard deviation of the random variable  $X_i$ , respectively. Then, the platform will be analysed separately for each of the extreme values of the random variable  $X_i$  and the corresponding target function is calculated. This procedure is repeated for all random variables considered in the problem. Table 3 to Figure 6: Tornado diagram showing the sensitivity of ultimate capacity of AA platform obtained from a pushover analysis

Table 8 and Error! Reference source not found. to Figure 7 give the tornado results and diagrams for the RSR and the ultimate strength of the platforms.

**Table 3: Sensitivity Results of R1-NSP**

Parameter	Lower Results			Upper Results		
	RSR	Base Shear (kN)	Failure Mode*	RSR	Base Shear (kN)	Failure Mode*
$C_d$	2.90	6360	PP, SZP, PPO	1.45	7017	PP, SZP, PPT
$C_m$	1.89	6690	PP, SZP, PPO	1.91	6688	PP, SZP, PPT
MG	2.10	6800	PP,SZP,PPT	1.75	6650	PP, SZP, PPO
Mass	2.05	7190	PP, SZP	1.55	5488	PP, SZP, PPO
$F_y$	1.65	5820	PP,SZP,PPT	1.95	6860	PP, SZP, PPT

E	1.90	6686	PP,SZP,PPT	1.95	6862	PP, SZP, PPO
Soil	1.30	5100	PP, PPO	2.10	7398	PP, SZP
Base Case	RSR: 1.90		Base Shear (kN): 6692	Failure Mode : PP, SZP, PPO		

\*PP: pile plasticity; SZP: splash zone plasticity; PPO: pile pull out; PPT: pile punch thru

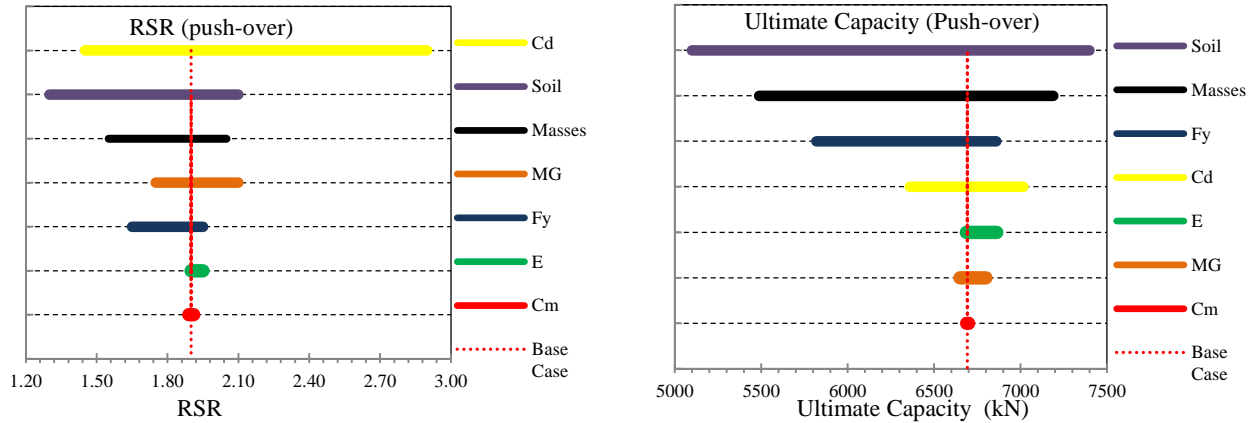


Figure 2: Tornado diagram showing the sensitivity of ultimate capacity of R1-NSP obtained from a pushover analysis

Table 4: Sensitivity Results of Nasr-PP

Parameter	Lower Results			Upper Results		
	RSR	Base Shear (kN)	Failure Mode*	RSR	Base Shear (kN)	Failure Mode*
Cd	4.21	11051	PP, JP, PPT	2.01	11853	PP, JP, PPT
Cm	2.65	11250	PP, JP, PPT	2.67	11354	PP, JP, PPT
MG	3.30	11550	PP, JP, PPT	2.14	10736	PP, JP, PPT
Mass	2.98	12687	PP, JP, PPT	2.27	9605	PP, JP, PPT
Fy	2.72	11510	PP, JP, PPT	2.72	11540	PP, JP, PPT
E	2.59	11000	PP, JP, PPT	2.66	11275	PP, JP, PPT
Soil	1.65	7250	PP, JP, PPT	3.24	13778	PP, JP
Base Case	RSR: 2.66		Base Shear (kN): 11270	Failure Mode : PP, JP, PPT		

\*PP: pile plasticity; JP: jacket plasticity; PPO: pile pull out; PPT: pile punch thru

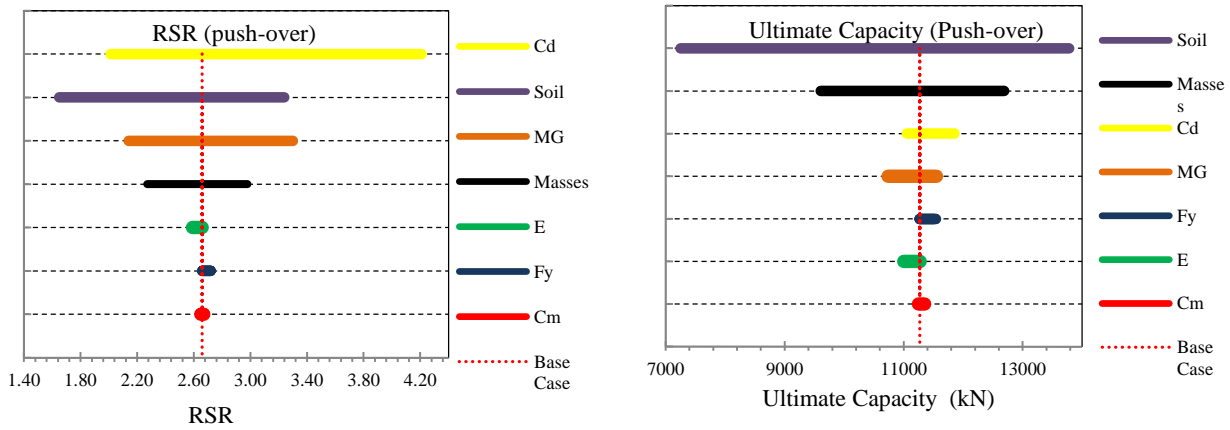


Figure 3: Tornado diagram showing the sensitivity of ultimate capacity of Nasr-PP obtained from a pushover analysis

Table 5: Sensitivity Results of Nasr-LQ Platform

Parameter	Lower Results			Upper Results		
	RSR	Base Shear (kN)	Failure Mode*	RSR	Base Shear (kN)	Failure Mode*
Cd	4.56	6576	PP, PPT	2.28	6642	PP, PPT
Cm	3.12	6661	PP, PPT	3.08	6725	PP, PPT
MG	3.84	6878	PP, PPT	2.48	6329	PP, PPT
Mass	3.36	7297	PP, PPT	2.72	5880	PP, PPT
Fy	2.96	6414	PP, PPT	3.08	6666	PP, PPT
E	3.04	6576	PP, PPT	3.08	6666	PP, PPT
Soil	1.62	4200	PPT	3.72	7979	PP, JP
Base Case	RSR: 3.08		Base Shear (kN): 6664	Failure Mode : PP, PPT		

\*PP: pile plasticity; SZP: splash zone plasticity; PPO: pile pull out; PPT: pile punch thru

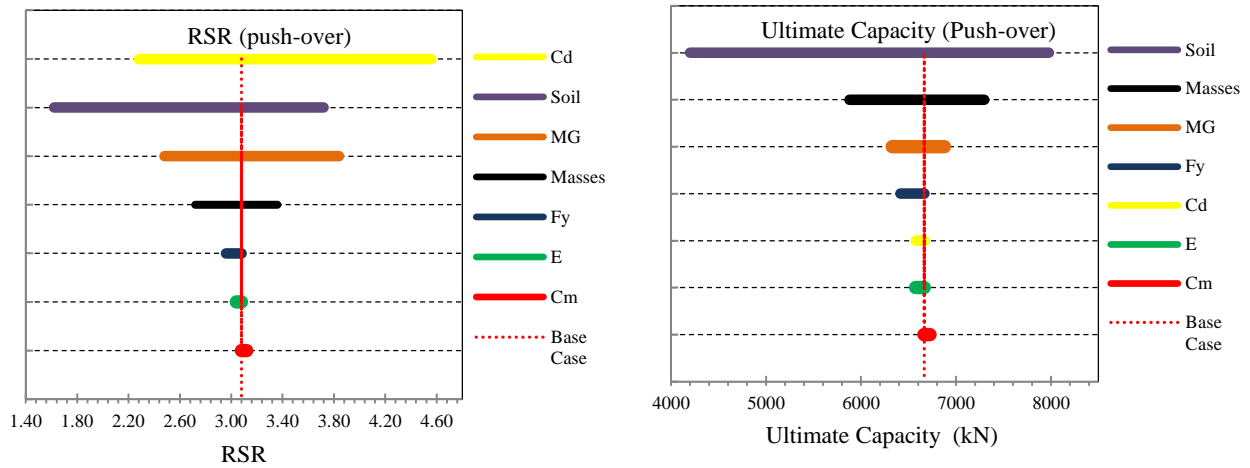


Figure 4: Tornado diagram showing the sensitivity of ultimate capacity of NASR-LQ obtained from a pushover analysis

Table 6: Sensitivity Results of N2 Platform

Parameter	Lower Results			Upper Results		
	RSR	Base Shear (kN)	Failure Mode*	RSR	Base Shear (kN)	Failure Mode*
C <sub>d</sub>	6.24	21155	PP	2.65	14838	PP
C <sub>m</sub>	3.77	15127	PP	3.65	14844	PP
MG	4.65	16492	PP	3.17	15125	PP
Mass	3.81	14232	PP	3.77	14860	PP
F <sub>y</sub>	3.49	15278	PP	4.05	16326	PP
E	3.77	15192	PP	3.77	15192	PP
Soil	2.89	11640	PPT, PPT	3.93	15695	PP
Base Case	RSR: 3.73		Base Shear (kN): 14967		Failure Mode : PP	

\*PP: pile plasticity; SZP: splash zone plasticity; PPO: pile pull out; PPT: pile punch thru

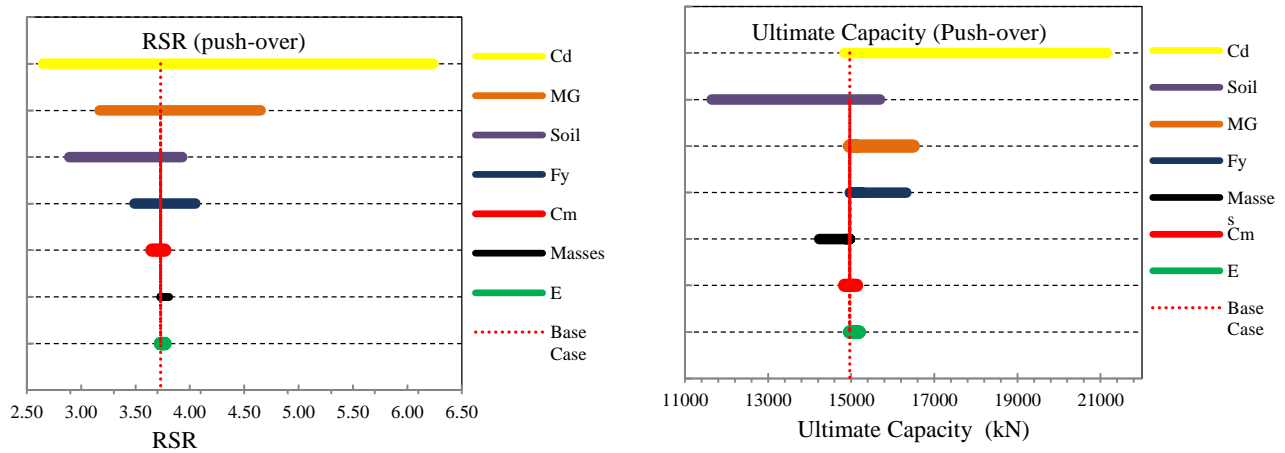


Figure 5: Tornado diagram showing the sensitivity of ultimate capacity of N2 platform obtained from a pushover analysis

Table 7: Sensitivity Results of AA Platform

Parameter	Lower Results			Upper Results		
	RSR	Base Shear (kN)	Failure Mode*	RSR	Base Shear (kN)	Failure Mode*
C <sub>d</sub>	3.00	10266	JP	1.60	12374	PP, PPT
C <sub>m</sub>	2.26	12468	PP, JP	2.24	12340	JP
MG	2.36	11685	H, JP	1.66	10585	PP
Mass	2.04	11238	JP	1.90	10750	H, JP
F <sub>y</sub>	1.82	10141	PP	2.44	13433	PP, JP
E	2.20	12113	H, PP, PPT	2.26	12267	H, PP, JP
Soil	1.30	8450	PP, JP	2.10	12569	PP, JP
Base Case	RSR: 2.24		Base Shear (kN): 12340		Failure Mode : PP, JP	

\*PP: pile plasticity; JP: Jacketplasticity; PPO: pile pull out; PPT: pile punch thru; H: hinged

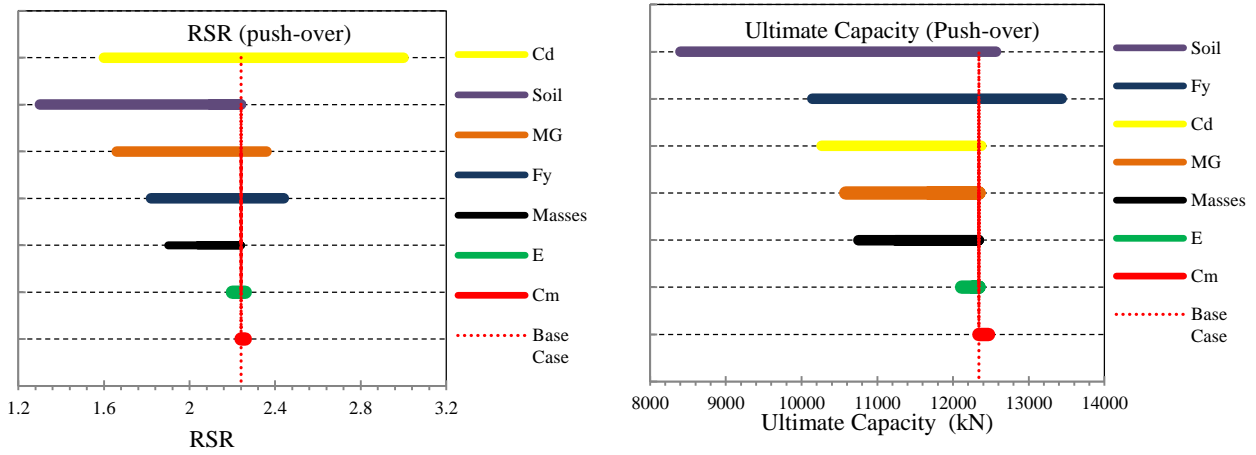


Figure 6: Tornado diagram showing the sensitivity of ultimate capacity of AA platform obtained from a pushover analysis

Table 8: Sensitivity Results of 2S-19 Platform

Parameter	Lower Results			Upper Results		
	RSR	Base Shear (kN)	Failure Mode*	RSR	Base Shear (kN)	Failure Mode*
C <sub>d</sub>	2.78	1965		1.12	1950	
C <sub>m</sub>	1.62	1968		1.60	1956	
MG	1.72	1960		1.52	1964	
Mass	1.62	1964		1.56	1916	
F <sub>y</sub>	1.52	1873		1.64	1992	
E	1.62	1966		1.60	1954	
Soil	1.12	1354		2.06	2538	
Base Case	RSR: 1.62		Base Shear (kN): 1976	Failure Mode:		

\*PP: pile plasticity; SZP: splash zone plasticity; PPO: pile pull out; PPT: pile punch thru

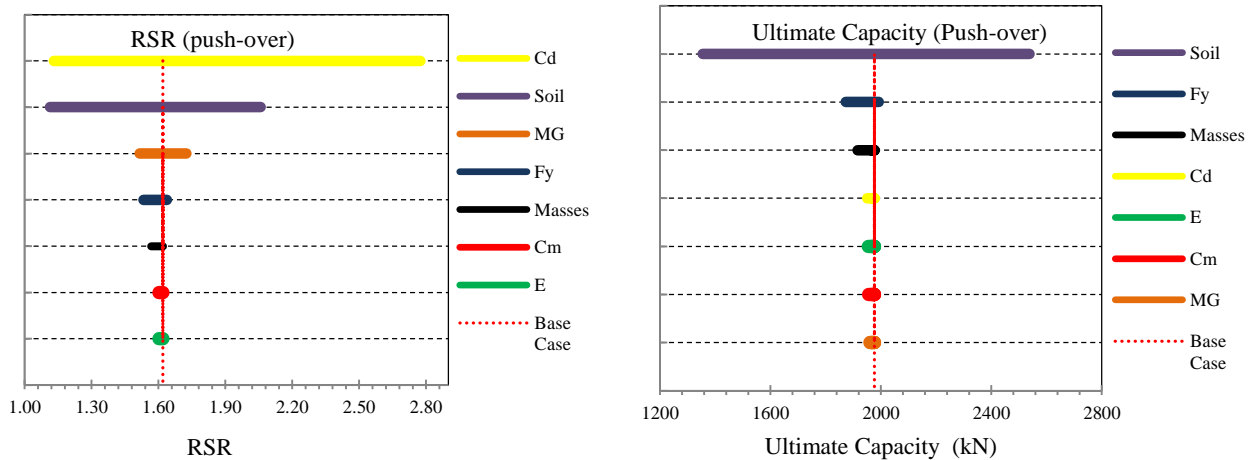


Figure 7: Tornado diagram showing the sensitivity of ultimate capacity of 2S-19 platform obtained from a pushover analysis

### 5. Summary and conclusions

Main conclusions of the conducted sensitivity analyses can be summarized as below:

- Among all random variables, Drag Coefficient (C<sub>D</sub>) has been the most significant variable which affects the RSR. It should be noted that according to the RSR definition (See equation 6), it depends on two parameters; environmental loading and the capacity of the structures.
- Among all studied random variables, soil has most impact on the Ultimate Capacity of the structures. It may worth mentioning that as in can be seen from Tornado diagrams, C<sub>D</sub> is not important for RSR. This is because it only affect the environment loading (See

equation 6). Moreover, it has been concluded that soil is a too sensitive variable and any little change in this parameter can noticeably affect the ultimate strength of structures.

- From the Tornado diagrams, it can generally be concluded that those parameters which are related to “load” such as MG and Mass are more important than those parameters which are related to “strength” of structures.
- As Tornado diagrams show, the effect of Modulus of Elasticity (E) and Inertia Coefficient (C<sub>M</sub>) can be ignored in investigating the ultimate behaviour of structures.



- From the table 3 to table 8, Collapse behaviour of structures is highly dependent on the value of random variables. For example:

-The results of this study can well be used for scoring and weighting in qualitative risk assessment of existing platforms.

#### Acknowledgment

The authors wish to thank Mr. Alizadeh (Director Manager of TWI Persia), and IOOC for providing the data required for modeling of the platforms.

#### 6. References

[Ref. 1] Zeinoddini, M., Ranjbar, P., et al., "Remaining Fatigue Life Assessment of Aging Fixed Steel Offshore Jacket Platforms", Accepted in Journal of Structure and Infrastructure Engineering.

[Ref. 2] Golpour, H., Zeinoddini, M., et al., "Structural Integrity Assessment of Aging Fixed Steel Offshore Jacket Platforms: A Persian Gulf Case Study", ASME 2013 32nd International Conference on Ocean, Offshore and Arctic Engineering, Nantes, France, June 9–14, 2013, OMAE2013-10712, pp. V02AT02A055.

[Ref. 3] Zeinoddini M, Ahmadi I, Khalili H, Golpour H, Nikoo MH, "Fatigue Life Assessment of Pinned Connections in an Aging Jacket Platform", 6th International Offshore Industries Conference, 4 and 5 May 2015 – Tehran, Sharif University of Technology.

[Ref. 4] Hezarjaribi M, Bahaari MR, Bagheri V, Ebrahimian H. Sensitivity analysis of jacket-type offshore platforms under extreme waves. Journal of Constructional Steel Research 2013; 83: 147-155.

[Ref. 5] Saltelli A., Annoni P., Azzini I., Campolongo F., Ratto M., Tarantola S., "Variance based sensitivity analysis of model output. Design and estimator for the total sensitivity index", Computer Physics Communications, Volume 181, Issue 2, February 2010, Pages 259–270.

[Ref. 6] Tian W., "A review of sensitivity analysis methods in building energy analysis", Renewable and Sustainable Energy Reviews, Volume 20, April 2013, Pages 411–419.

[Ref. 7] Wainwright H., Finsterle S., Jung Y., Zhou Q., Birkholzer J., "Making sense of global sensitivity analyses", Computers & Geosciences, Volume 65, April 2014, Pages 84–94.

[Ref. 8] Rodriguez G., Carrillo A., Dominguez F., Lopez J., Zhang Y., "Uncertainties and sensitivity analysis in building energy simulation using macroparameters", Energy and Buildings, Volume 67, December 2013, Pages 79–87.

[Ref. 9] Saltelli, A., Tarantola, S., Campolongo, F., and Ratto, M. (2004). Sensitivity analysis in practice: A guide to assessing scientific models, Wiley, New York.

[Ref. 10] Kong J. S., and Frangopol D. M., (2005), Sensitivity Analysis in Reliability-Based Lifetime Performance Prediction Using Simulation, Journal of Materials in Civil Engineering, Vol. 17, No. 3, June 1.

[Ref. 11] Porter, K.A. (2003). An Overview of PEER's Performance-Based Earthquake Engineering Methodology. Conference on Applications of Statistics and Probability in Civil Engineering (ICASP9), Civil Engineering Risk and Reliability Association (CERRA), San Francisco, CA, July 6-9, 2003.

[Ref. 12] Porter, K.A., J.L. Beck, and R.V. Shaikhutdinov (2002). Sensitivity of building loss estimates to major uncertain variables. Earthquake Spectra, 18 (4), 719-743.

[Ref. 13] Porter, K.S. "A Beginner's Guide to Fragility, Vulnerability, and Risk", University of Colorado Boulder and SPA Risk LLC, Denver CO USA.

[Ref. 14] Bentley Systems, SACS Suite program, version 5.3, 2011.

[Ref. 15] NORSOK Standard N-006, "Assessment of structural integrity for existing offshore load, bearing structures", Edition 1, March 2009.

[Ref. 16] American Bureau of Shipping (ABS), "Commentary on the Guide for Buckling and Ultimate Strength Assessment for Offshore Structures", ABS Plaza, Houston, TX, USA, March 2005.

[Ref. 17] Gerwick, "Construction of Marine and Offshore Structures", 2007.

[Ref. 18] American Petroleum Institute, "Recommended Practice for Planning, Designing and Constructing Fixed Offshore Platforms - Working Stress Design", API RP 2A-WSD, 21st Edition, Supplements 2-3, October 2007.

[Ref. 19] CEN, EUROCODE 3, "Design of Steel Structures, General Rules and Rules for Buildings", European Committee for Standardization, 2005.

[Ref. 20] Skallerud, B., Amdahl, J. (2002). Nonlinear analysis of offshore structures. Research studies Press Ltd, Bldock, Hertfordshire, England.

[Ref. 21] JCSS. (2001). Probabilistic Model Code - Part 1: Basis of Design. (12th draft). Joint Committee on Structural Safety, March 2001.

[Ref. 22] Hansen, P.F., Madsen H.O., Tjelta T.I. (1995). Reliability analysis of a pile design, *Journal of Marine Structures* 8(2): 171-198.

[Ref. 23] Baecher, G.B., Christian, J.T. (2003). *Reliability and Statistics in Geotechnical Engineering*. John Wiley and Sons.